

OPERATOR'S MANUAL


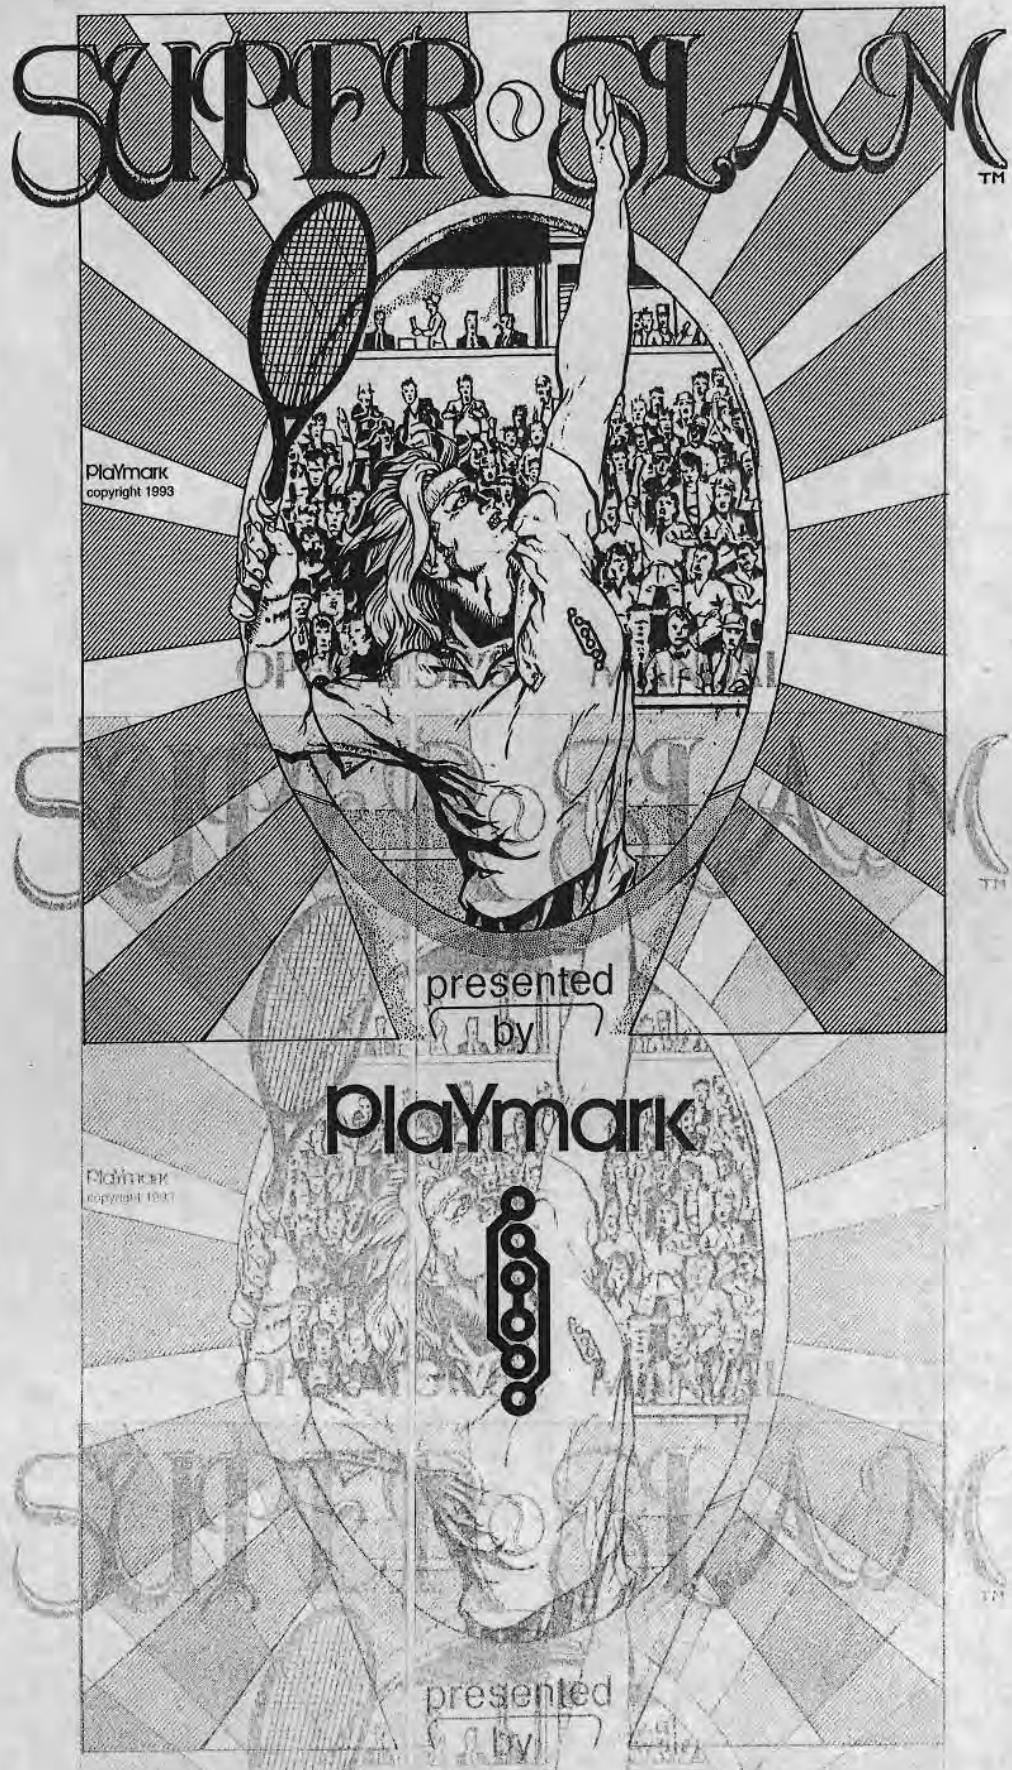


Playmark

PC B CONNECTOR JAMMA

SOLDER SIDE	PIN	NO.	COMPONENTS SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
+12V	F	6	+12V
SPEAKER (-)	L	10	SPEAKER (-)
GREEN	N	12	RED
SYNC	P	13	BLUE
R	14		
COIN IN 2	T	16	COIN IN 1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P SHOOT1	Z	22	1P SHOOT1
2P SHOOT2	a	23	1P SHOOT2
2P SHOOT3	b	24	1P SHOOT3
c	25		
d	26		
GND	e	27	GND
GND	f	28	GND

CONTROL PANEL

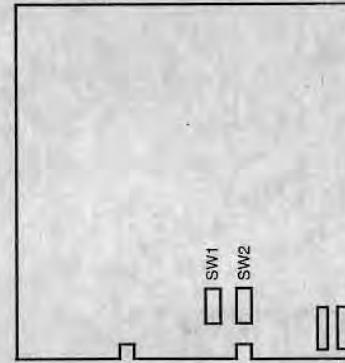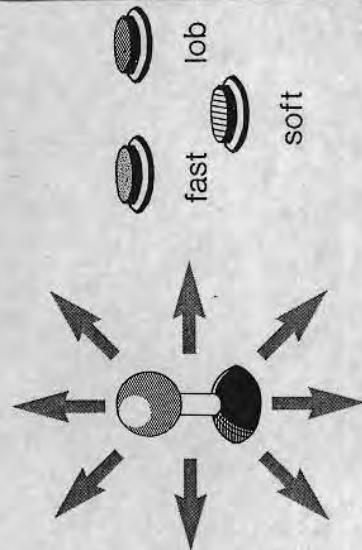

GETTONIERA 1


ITEM	DESCRIPTION
NUMBER OF COINS FOR CREDITS	1 COIN 2 COINS 3 COINS 4 COINS 5 COINS 6 COINS 7 COINS 8 COINS
NUMBER OF CREDITS FOR COINS	1 CREDIT 2 CREDITS 3 CREDITS 4 CREDITS 5 CREDITS 6 CREDITS 7 CREDITS 8 CREDITS
COIN COUNTER	1 COUNTER - 4 SLOTS 1 COUNTER - 1 SLOT
CREDIT MODE	COMMON EACH ONE

ITEM	DESCRIPTION
DIFFICULTY	EASY MEDIUM HARD NOT USED
SEC. PLAY TIME	START/CONTINUE
PLAYER VS COM	3 / 3 2 / 2
PLAYER VS PLAYER	3 / 1.5 2 / 1
POINTS START	4 / 4 3 / 4 3 / 3 0 / 0
CABINET TYPE	4 PLAYERS 2 PLAYERS
DEMO SOUND	NO YES


CONNETTORI JP3 - JP4

PIN	JP3 - JP4
1	START
2	SHOOT3
3	SHOOT2
4	SHOOT1
5	UP
6	DOWN
7	LEFT
8	RIGHT
9	COIN IN
10	GND

1 2 3 4 5 6 7 8 9 10

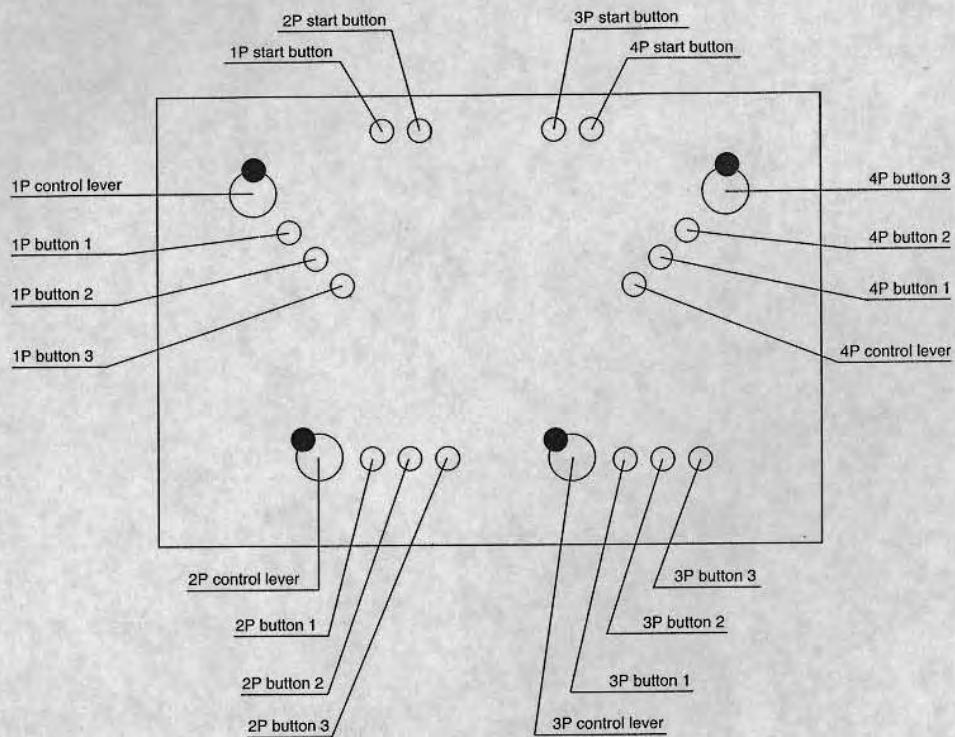

PIN	JP3 - JP4
1	START
2	SHOOT3
3	SHOOT2
4	SHOOT1
5	UP
6	DOWN
7	LEFT
8	RIGHT
9	COIN IN
10	G N D

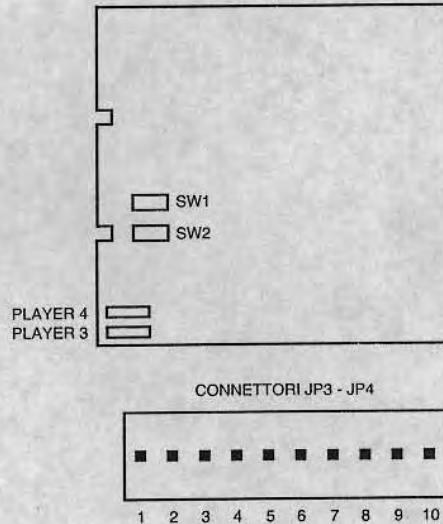

Playmark

playmark srl.

20159 milano via g. murat 28 telefoni 02-66803664 fax 02-66803684